


A Life-Time Investment

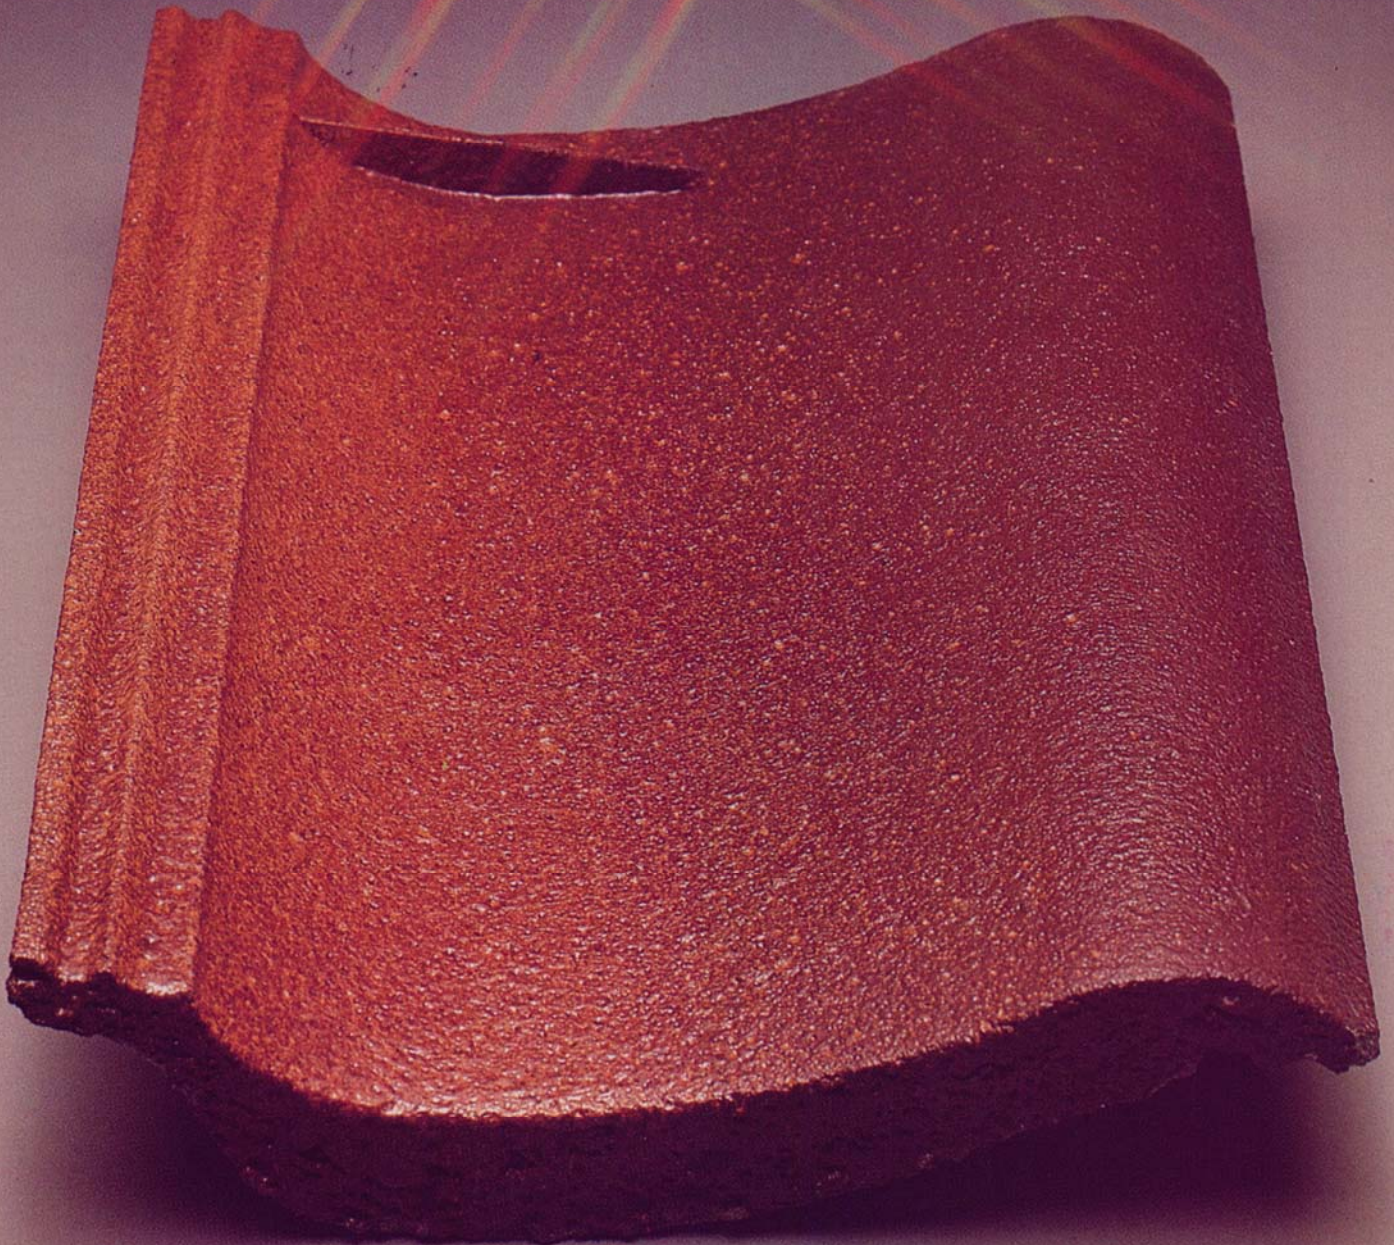

 ***Lama***
QUALITY ROOFING TILES

Lama

Roofing Tiles Specialist

The History of **Lama** spans back 20 years where we have our humble beginning.



Today utilising the most up-to-date technology and know how we have earned a reputation amongst our peers for our quality and reliability.



Time and money have not been spared to bring in a tile which is totally weather resistant and leak proof.

For at **Lama** we care about what we make and those we serve — Only the best manufactured tiles leave the factory.


And for your selections, they come in various monotone and duotone colours.

Insist on Lama — the reliable quality Roofing Tiles.

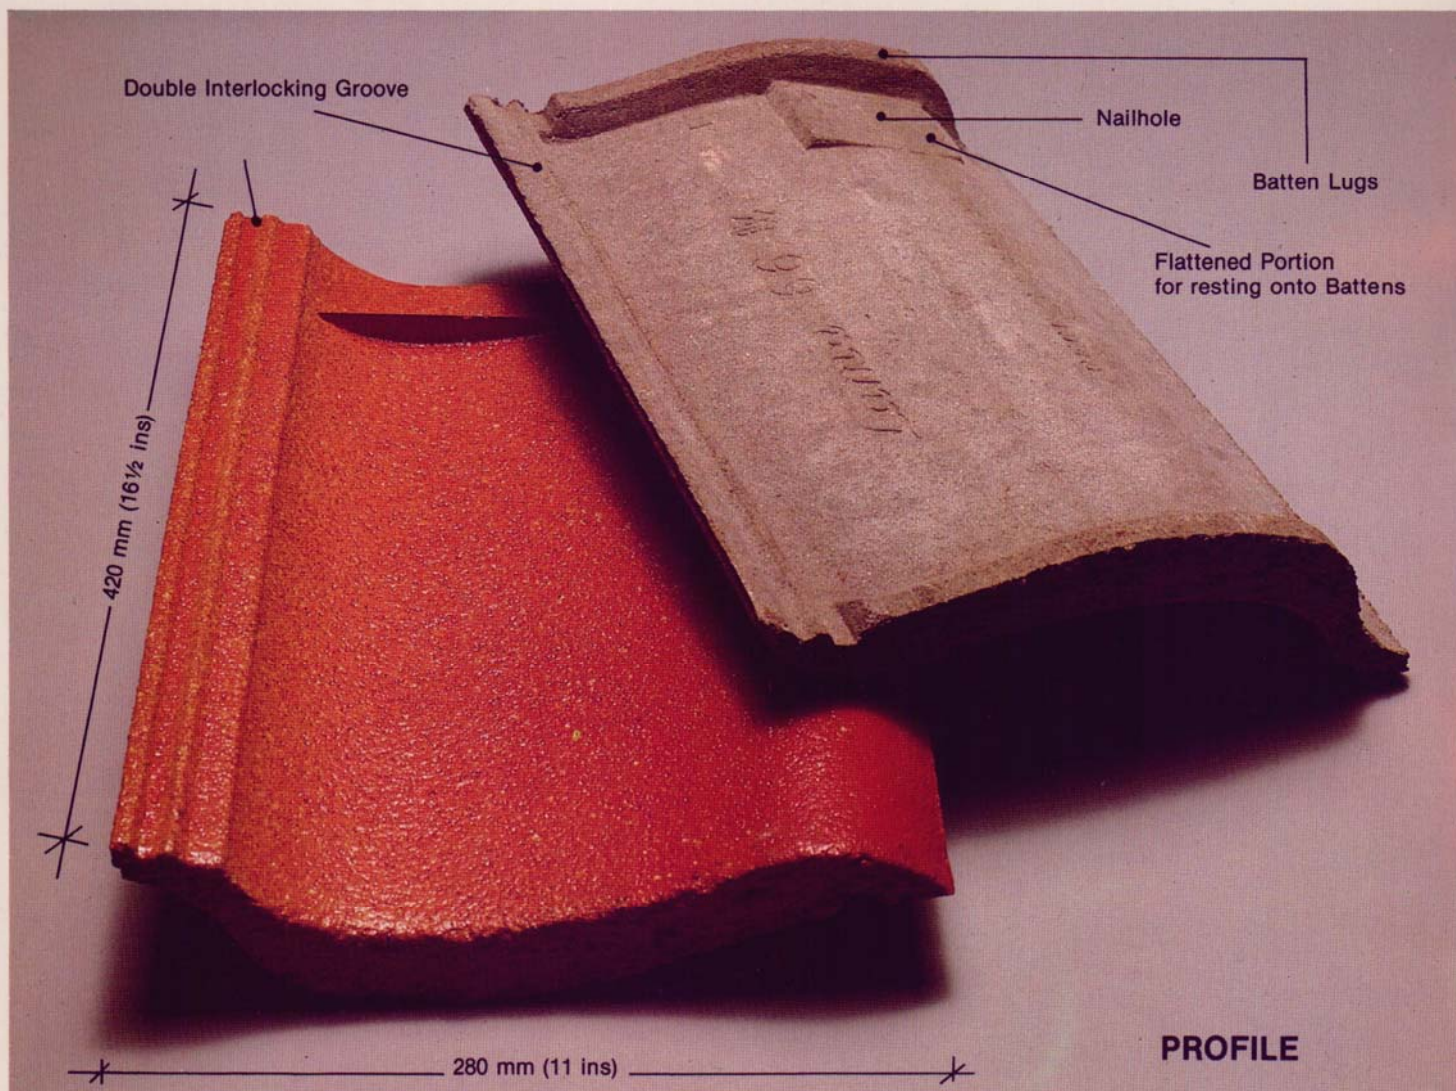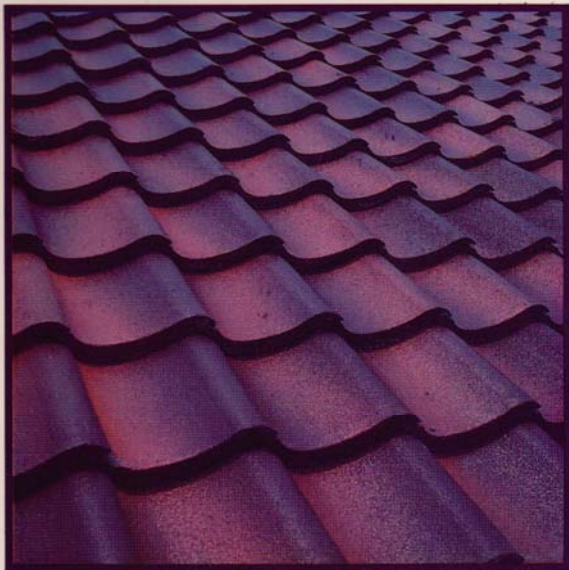


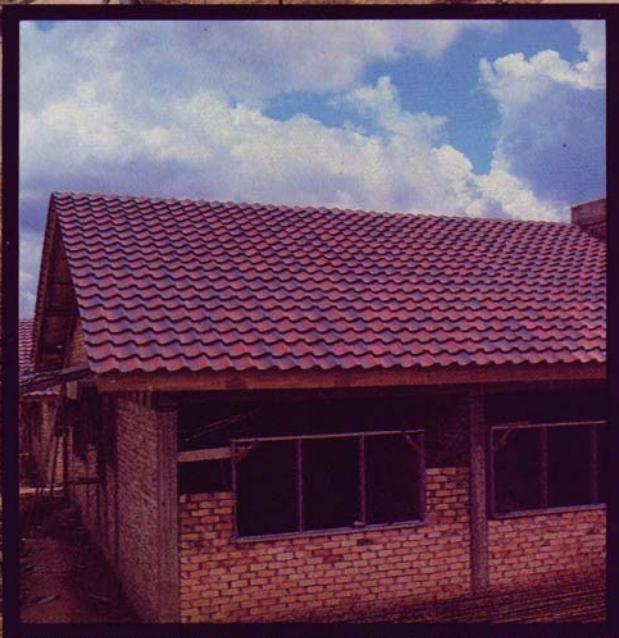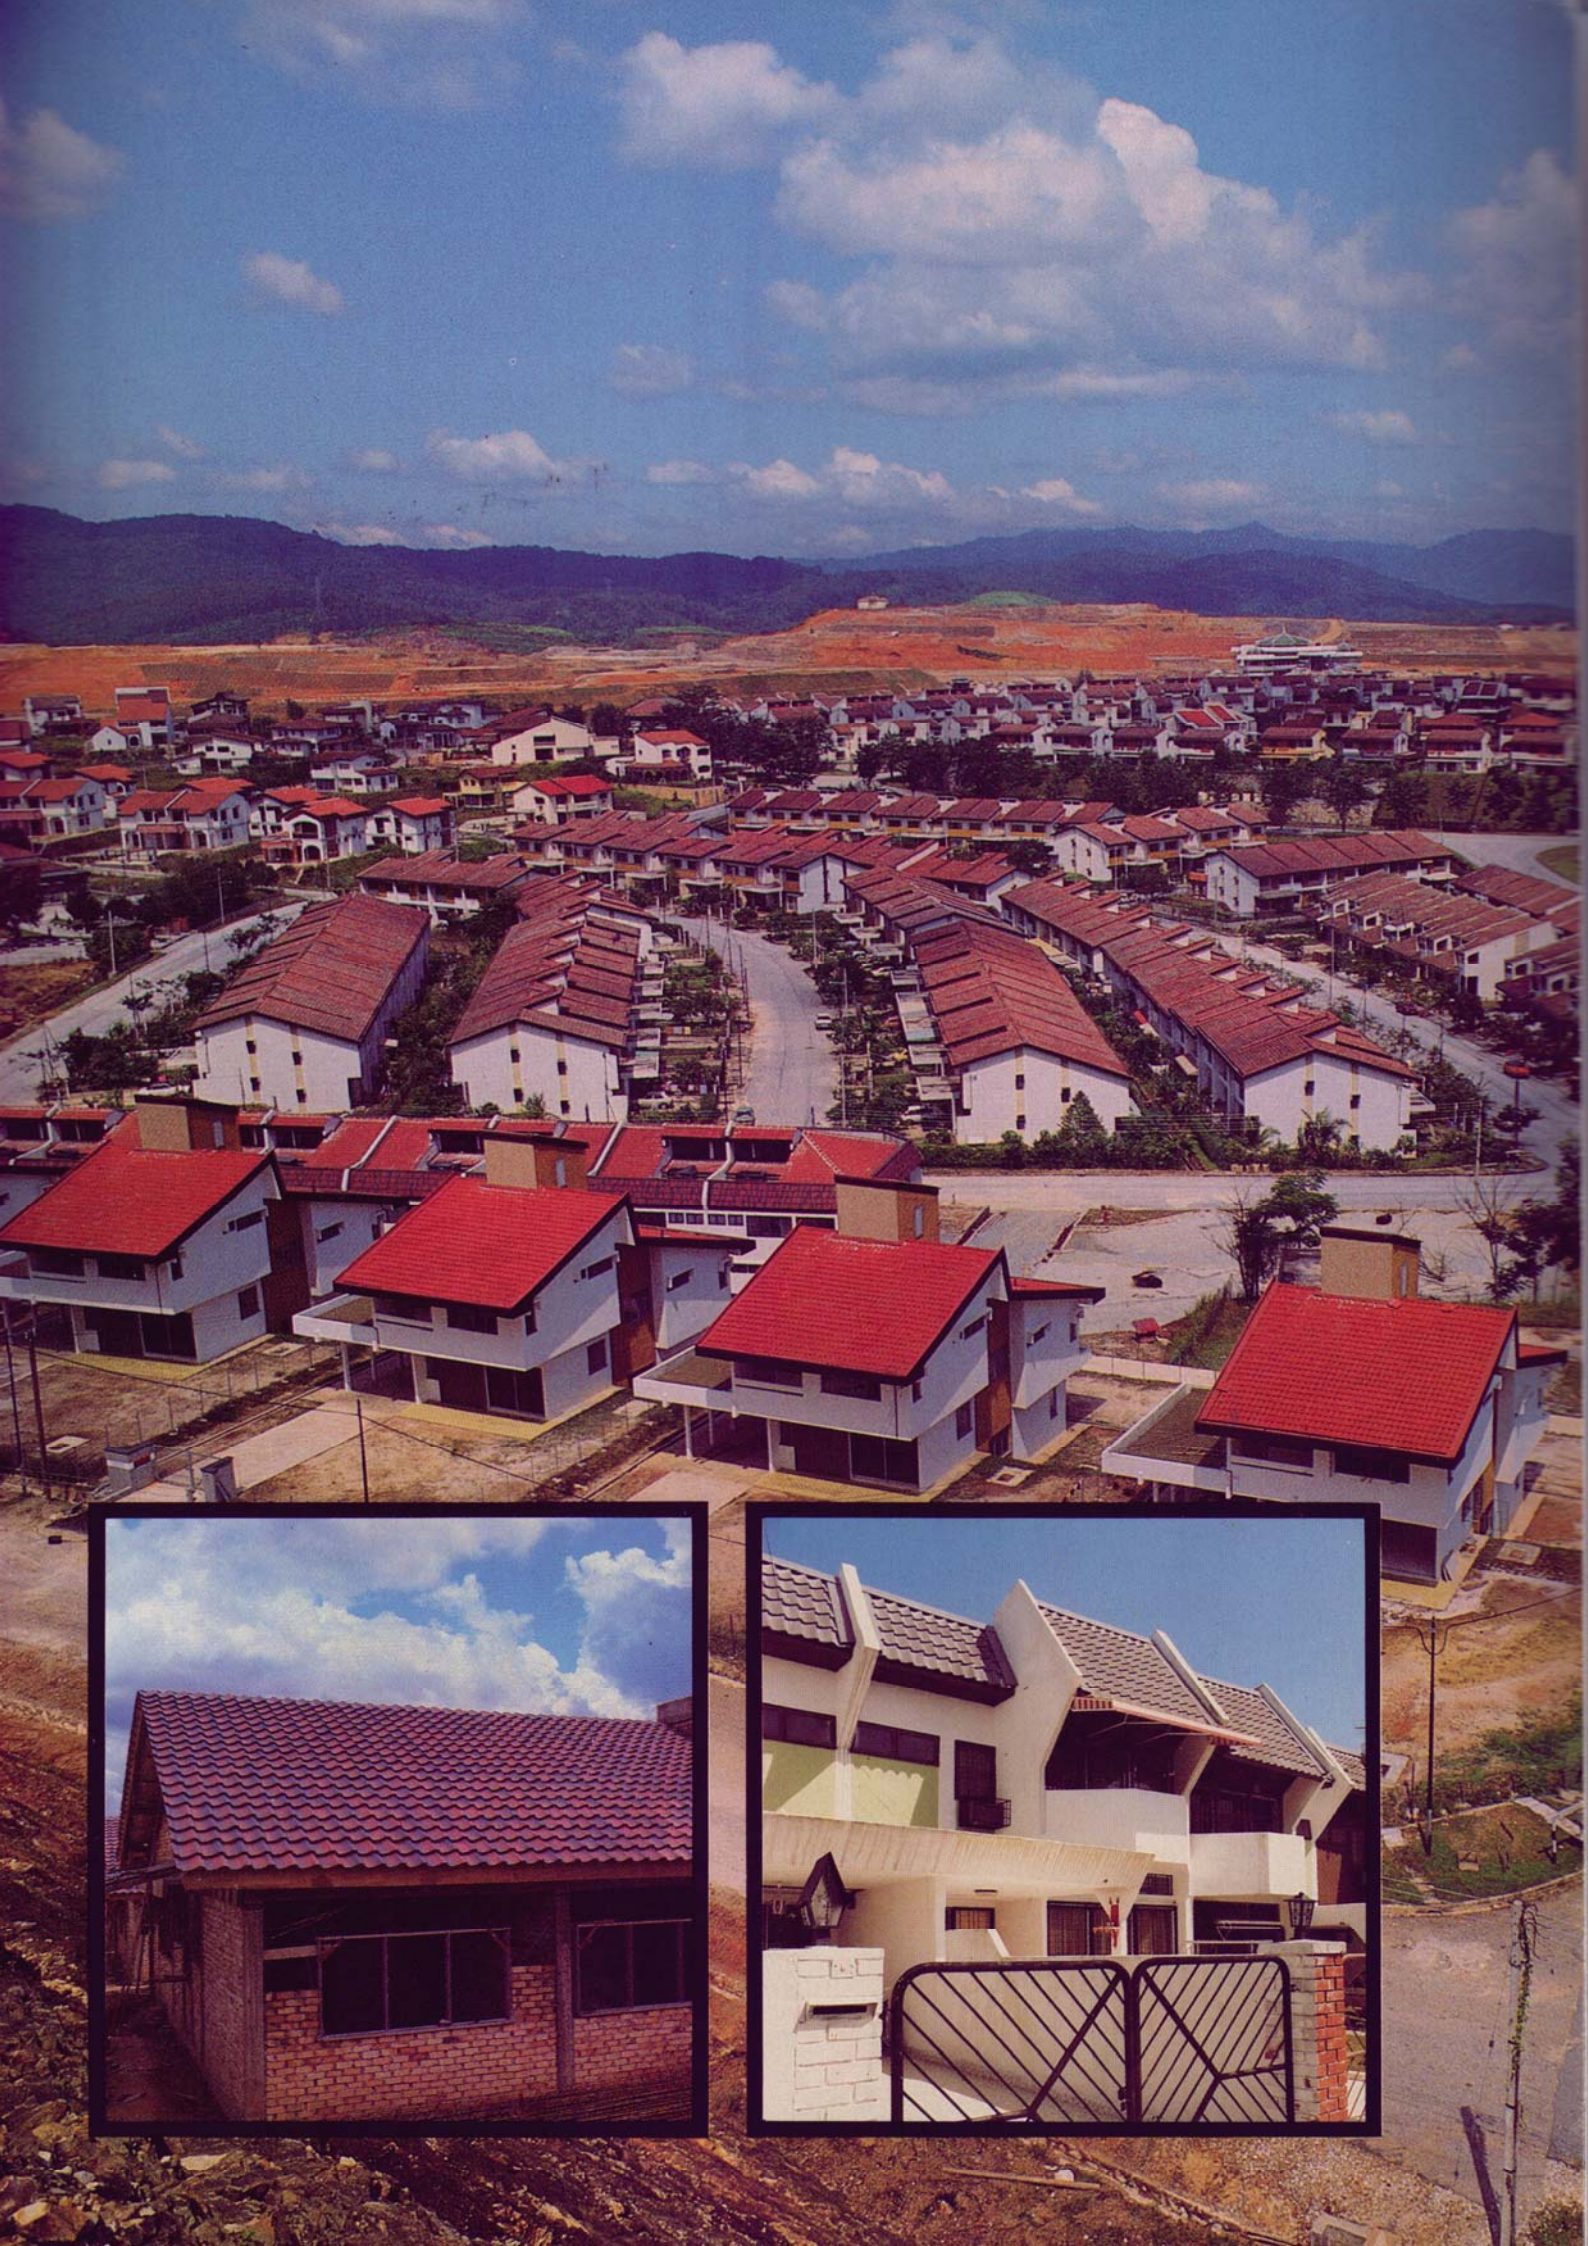


DUOTONE COLOURS

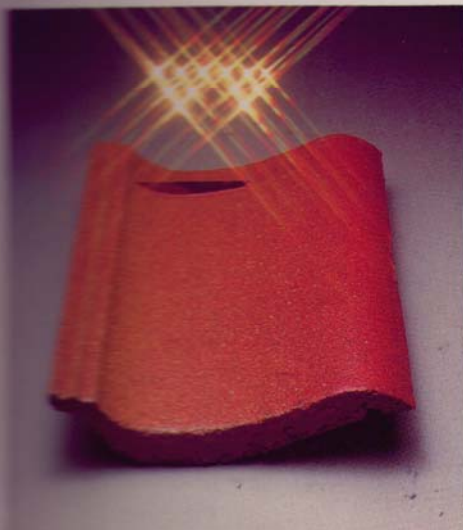


RED & YELLOW

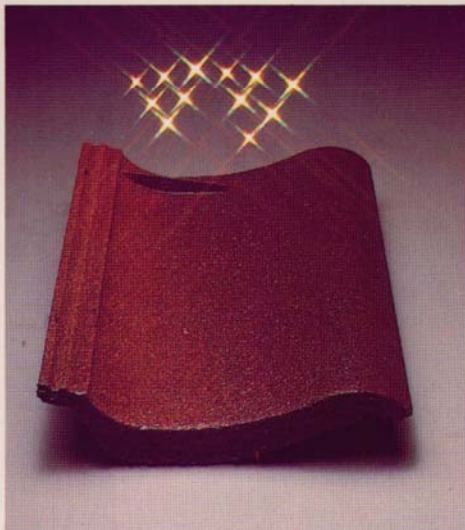


BROWN & TANGERINE

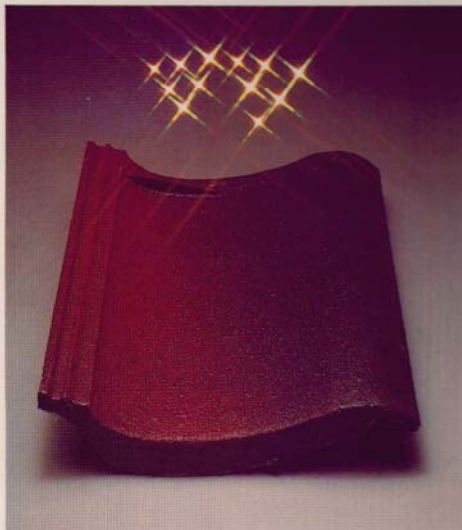


BLACK & RED

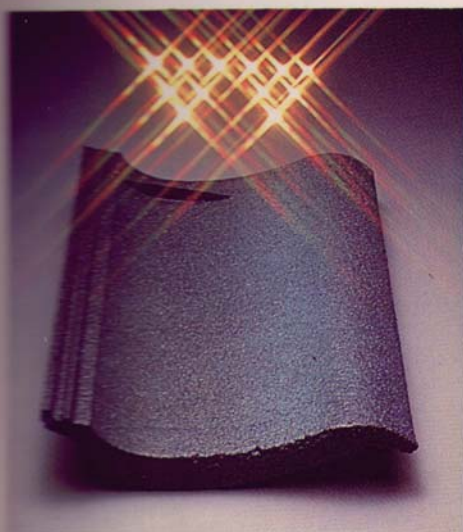

BLACK & BLUE

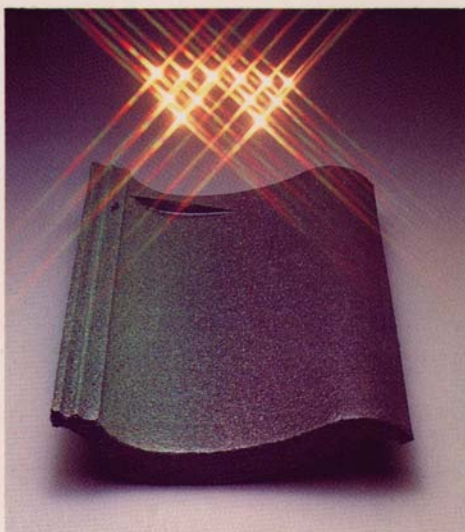

BLACK & GREEN

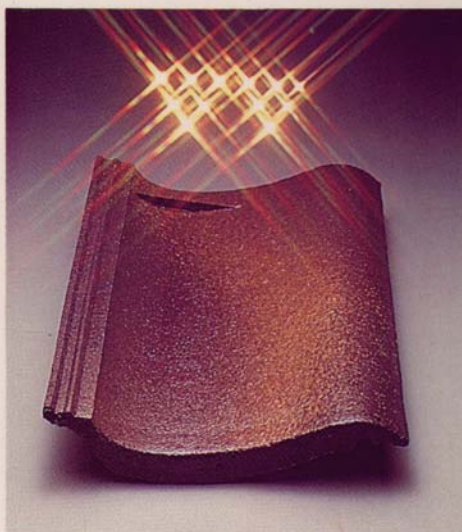


BLACK & YELLOW



RED

MONOTONE COLOURS

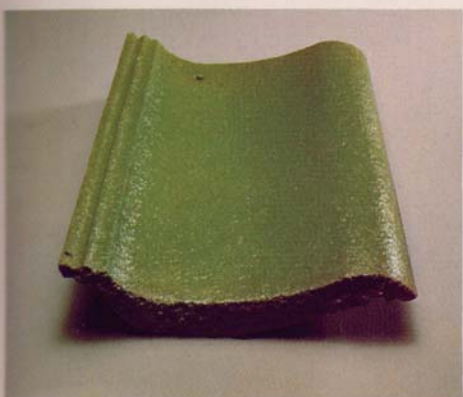

GREEN



BROWN




GREY



Lama

OTHER COLOURS MAKE TO ORDER


ROOF LAYING

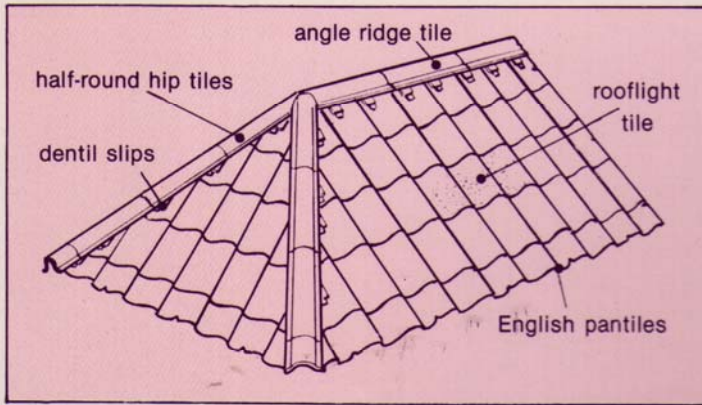


PERSPECTIVE SKETCH SHOWING TYPICAL DETAILS OF ROOF

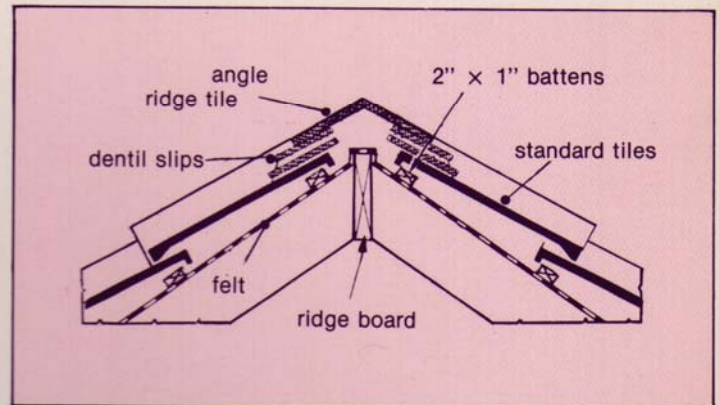

SECTION THROUGH RIDGE

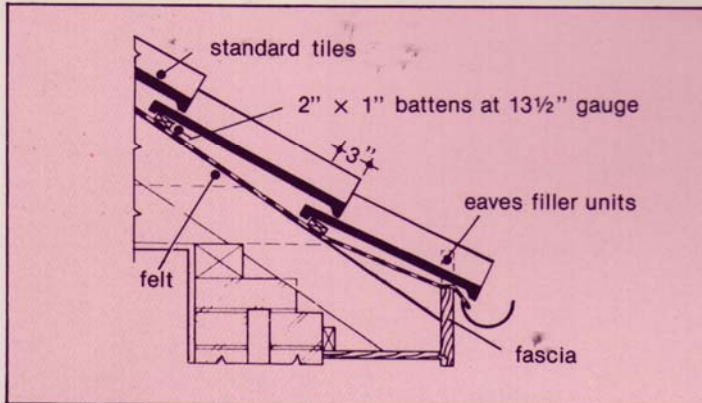

TYPICAL DETAIL AT EAVES

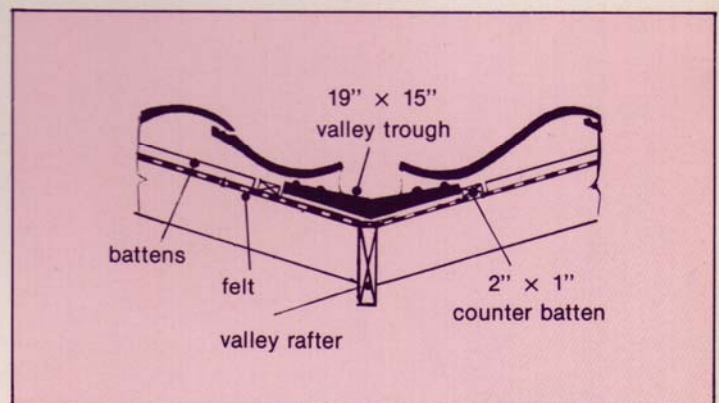

TYPICAL DETAIL OF VALLEY

SPECIFICATION AND DETAILS

1. **Materials:** Extruded concrete roof tile with fused monotone/duotone colour coat.
2. **Roof Pitch (minimum):** $22\frac{1}{2}^{\circ}$ above (Standard)
 $17\frac{1}{2}^{\circ}$ — $22\frac{1}{2}^{\circ}$ (Low Pitch)
3. **Composition:** Portland cement, selected aggregates and cement based oxide colour coat and transparent finishing coat.
4. **Fire rating:** Incombustible and fully fire resistant.
5. **Dimension:** 420 mm \times 280 mm (16 $\frac{1}{2}$ ins. \times 11 ins.)
6. **Weight per Tile:** 3.65 kg. (8 lbs.)
7. **Covering Capacity per 9.29 sq. m (100 sq. ft.):** 110 pcs.
8. **Batten Spacing:** 330 mm (13 $\frac{1}{2}$ ins.)
9. **Recommended Nailing:** Alternate course with 38mm (1 $\frac{1}{2}$ ") alloy nails.

規格及細則：

1. 原料：一種擠壓成形的三合土屋瓦具備溶合的單色／兩色漆面。
2. 屋頂覆蓋(至少)： $22\frac{1}{2}^{\circ}$ 以上(中等)
 $17\frac{1}{2}^{\circ}$ — $22\frac{1}{2}^{\circ}$ (低覆蓋)
3. 成份：Portland 洋灰，特選混凝土料，洋灰基氧化顏色及透明的外層。
4. 防火效率：不燃性及全面防火。
5. 面積：420 毫米 \times 280 毫米
(16 $\frac{1}{2}$ 吋 \times 11 吋)
6. 每塊重量：約 8 磅。
7. 蓋屋頂能力：每方丈 110 塊。
8. 挾板尺度：330 毫米 (13 $\frac{1}{2}$ 吋)
9. 用釘介紹：每排間隔用 1 $\frac{1}{2}$ 吋釘。



南馬瓦廠(芙蓉)有限公司

LAMA TILE WORKS (SEREMBAN) SDN. BHD.

HEAD OFFICE: No. 5, JALAN CAMERON, SEREMBAN. TEL: 75886, 76351, 716989 & 716993.
FACTORY: 4TH MILE, JALAN JELEBU, SEREMBAN. TEL: 74566 & 73104.

BRANCHES: BUTTERWORTH BRICKWORKS SDN. BHD. SUNGEI DUA, PROVINCE WELLESLEY. TEL: 345050.
LAMA TILE (JOHOR) SDN. BHD. 10, JALAN SENGGAMA, LARKIN INDUSTRIAL ESTATE, JOHOR BAHRU.
TEL: 62380.

— AVAILABLE FROM —